




UX10 FULLY RUGGED TABLET

- Processeur Intel® Core™ i5/i7 de 12e génération
- Écran tactile capacitif LumiBond® 2.0 Full HD de 10,1" avec technologie de lecture en plein soleil Getac (1 000 nits)
- Sécurité améliorée grâce à l'option Intel® vPro®, à la caméra d'authentification Windows (Hello Face) et aux options d'authentification multifactorielles.
- Connectivité E/S polyvalente, y compris Thunderbolt™ 4.
- Amélioration des performances Wi-Fi, GPS et LTE.



UX10 3D Demo

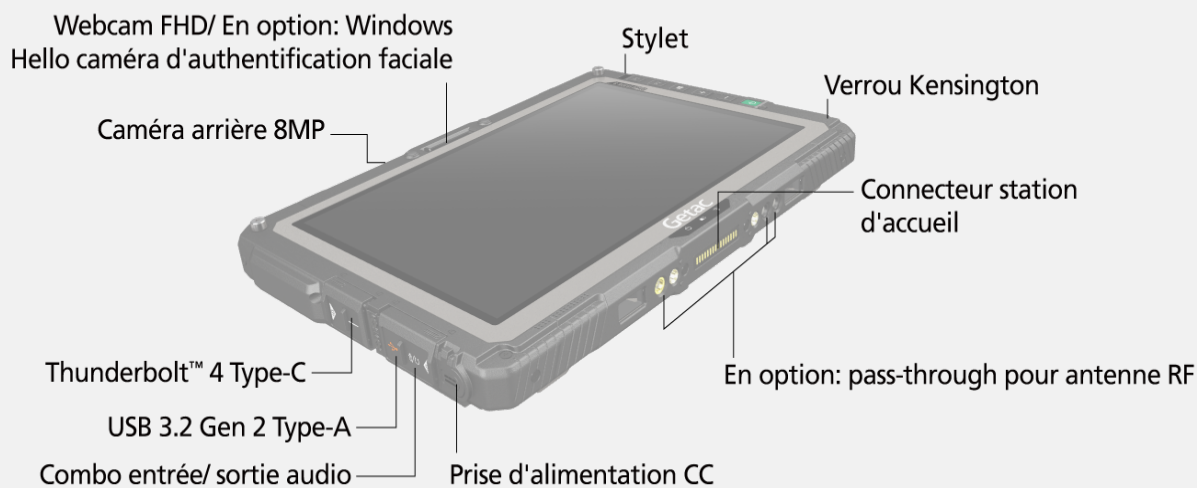

SPÉCIFICATIONS

Génération

G3

Système d'exploitation

Windows 11 Pro

Plateforme informatique mobile

Intel® Core™ i5-1235U Processor
Max. 4.4GHz with Intel® Turbo Boost Technology

- 12MB Intel® Smart Cache

Platform options:

Intel® Core™ i5-1245U vPro® Processor
Max. 4.4GHz with Intel® Turbo Boost Technology

- 12MB Intel® Smart Cache

Intel® Core™ i7-1255U Processor
Max. 4.7GHz with Intel® Turbo Boost Technology

- 12MB Intel® Smart Cache

Intel® Core™ i7-1265U vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost Technology

- 12MB Intel® Smart Cache

Intel® Pentium™ 8505 Processor
Max. 4.4GHz with Intel® Turbo Boost Technology

- 8MB Intel® Smart Cache

Contrôleur Graphique

Intel® UHD Graphics

Écran

10.1" Wide Viewing Angle TFT LCD WUXGA (1920 x 1200)

Protection film

1,000 nits LumiBond® display with Getac sunlight readable technology

Capacitive multi-touch screen

Stockage et mémoire

8GB DDR4

Optional: 16GB / 32GB DDR4

256GB PCIe NVMe SSD

Optional: 512GB / 1TB PCIe NVMe SSD

Clavier

Power button

5 tablet programmable buttons

Périphérique de pointage

Touchscreen

- Capacitive multi-touch screen

- Optional: Dual mode touchscreen (multi-touch and digitizer)

Logement d'extension

Optional (top side): 1D/2D imager barcode reader, or Serial port, or USB 3.2 Gen 1 Type-A port, or LAN port (RJ45), or microSD or HF RFID reader i, or HDMI 2.0.ii

Optional (right side): LAN port (RJ45) or Fingerprint reader iii

Optional (back side): Smart card reader, or Bridge battery, or Bridge battery + Smart card reader iv

Interface d'E/S

FHD webcam x 1 v

8M pixels auto focus rear camera x 1

Audio in/out combo x 1

DC in Jack x 1

USB 3.2 Gen 2 Type-A x 1

Thunderbolt™ 4 Type-C x 1

Docking connector x 1

Optional: Windows Hello face-authentication camera (front-facing) x 1 v

Optional: RF antenna pass-through for GPS, WWAN and WLAN

Interface de communication

Optional: 10/100/1000 base-T Ethernet

Intel® Wi-Fi 6E AX211, 802.11ax

Bluetooth (v5.3) vi

Optional: Dedicated GPS with L1/L5 ix

Optional: 4G LTE mobile broadband with integrated GPS

vii, viii, ix, x

Optional: 5G Sub-6 with integrated GPS vii, viii, ix

Dual SIM (Micro-SIM 3FF and e-SIM) vii, viii

Fonctionnalités de sécurité

TPM 2.0

Kensington lock

Optional: Intel® vPro® Technology

Optional: Fingerprint reader iii

Optional: HF RFID reader i, ii

Optional: Smart card reader iv

Optional: Windows Hello face-authentication camera (front-facing) v

Alimentation

AC adapter (65W, 100-240VAC, 50/60 Hz)

Li-ion battery (11.1V, typical 4200mAh; min. 4080mAh) x 1

Optional: High capacity Li-ion battery (10.8V, 9240mAh) x 1

Optional: Bridge battery iv

Dimensions (l x P x H) et poids

279 x 194,5 x 23,5 mm (10,98" x 7,65" x 0,92")^{xi}

1,22 kg (2,68 lb)^{xi}

Caractéristiques de conception renforcée

MIL-STD-810H certified

IP66 certified

MIL-STD-461G certified xii

Vibration & 6ft (1.8m) drop resistant xiii

Optional: ANSI/UL 121201, CSA C22.2 NO. 213

(Class I, Division 2, Groups A, B, C, D) xiv

Spécifications environnementales

Temperature xv:

- Operating: -29°C to 63°C / -20°F to 145°F

- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:

- 95% RH, non-condensing

Logiciels préinstallés

Getac Utility

Getac Camera

Getac Geolocation

Getac Barcode Manager^{xvi}

Getac Driving Safety Utility (trial version)

Getac KeyWedge Barcode Reader Utility (trial version)

En option : Absolute Persistence[®]

Logiciel en option

Getac Driving Safety Utility

Getac KeyWedge Barcode Reader Utility

Getac Device Monitoring System (GDMS)

Getac VGPS Utility^{xvii}

Accessoires

Battery (11.1V, typical 4200mAh; min. 4080mAh)

AC adapter (65W, 100-240VAC)

Capacitive stylus with tether

Optional:

Carry bag

Folio case

Battery (11.1V, typical 4200mAh; min. 4080mAh)

High capacity Li-ion battery (10.8V, 9240 mAh)

Multi-Bay charger (Dual-Bay)

Multi-Bay charger (Eight-Bay)

AC adapter (65W, 100-240VAC)

AC adapter (90W, 100-240VAC)

MIL-STD-461 AC adapter (90W, 100-240VAC)

DC-DC vehicle adapter (120W, 11-32VDC)

Digitizer pen

Capacitive stylus with tether

Protection film

Hard handle

Rotating hand strap with kickstand

Shoulder strap (2-point)

Shoulder harness (4-point; handsfree)

Detachable keyboard

Vehicle cradle xviii

Keyboard dock

Vehicle dock xviii

Office dock

100W Type-C adapter

UX10 FULLY RUGGED TABLET

Garantie Bumper-to-Bumper

Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard

Garantie Bumper-to-Bumper de 3 ans

i. 13.56MHz contactless HF RFID reader (ISO 15693, 14443 A/B, Mifare and FelCa™ compliant). ii. 1D/2D imager barcode reader, Serial port, USB 3.2 Gen 1 Type-A port, LAN port (RJ45), HF RFID reader, MicroSD and HDMI 2.0 are mutually exclusive options. iii. Fingerprint reader and LAN Port are mutually exclusive options. iv. Smart card reader, Bridge battery and Bridge battery + Smart card reader are mutually exclusive options. v. FHD webcam and optional Windows Hello face-authentication camera (front-facing) are mutually exclusive options. vi. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area. vii. One physical SIM card slot and one eSIM. viii. Network service may vary depending on local telecommunication providers. ix. Supports GPS, GLONASS, Galileo, BeiDou and QZSS. Only available in US, UK, EU, Australia and New Zealand. x. Units with 4G LTE option come with an embedded SIM card slot. xi. Weight and dimensions vary from configurations and optional accessories. xii. MIL-STD-461 90W AC adapter sold separately. xiii. Drop test results vary from configurations and optional accessories. xiv. Available with limited configurations and environment conditions. xv. Tested by an independent third-party test lab following MIL-STD-810H. xvi. Available when barcode reader option is selected. xvii. Models require either embedded or standalone GPS module. xviii. Gamber Johnson and Havis vehicle docks are e-mark certified.

	Station d'accueil pour véhicule	Station d'accueil pour bureau
Port série	1	1
Port VGA	-	1
Micro	-	1
Sortie audio	-	1
Prise d'alimentation CC	1	1
Port USB	USB 2.0 x 2 USB 3.2 Gen 1 x 2	USB 2.0 x 2 USB 3.2 Gen 1 x 2
Port LAN	1	1
Port HDMI	-	1
Connecteur d'antenne RF	3 (WWAN, WLAN et GPS)	-
Verrou Kensington	1	1

Getac



GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave
91140 Villebon sur Yvette Tel: +33 160 12
80 60 Sales-Getac-France@getac.com |

www.getac.com/fr/

Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.